



## 60W STANDARD SWITCHING POWER SUPPLY SINGLE OUTPUT

(Dimension)  
 L:312 mm  
 W:30mm  
 H:19mm  
 Weight: 0.093Kg



### ■Applications

- .Industrial automation machinery
- .Mechanical,electrical equipment
- .LED slim lighting equipment
- .IT communication equipment
- .Aging equipment

### ■Features

- .Over-load,Over-temp. protection
- .cooling by free air convection
- .LED power indicator
- .100% full load burn-in test
- .No-load consumption <0.7W
- .Withstand 300VAC surge input for 5 seconds
- .Working temperature up to 60°C
- .5G vibration tested
- .High efficiency,long life,high reliability
- .2 years warranty




### Specifications

Product No.		DX-60-12	DX-60-24			
Output	DC voltage	12V	24V			
	Rated Current	5A	2.5A			
	Current Range	0-5A	0-2.5A			
	Rated Power	60W	60W			
	Ripple and Noise(Max)Note.2	150mVp-p	240mVp-p			
	Voltage adjustment	10.8-13.2V	22-27.6V			
	Voltage tolerance Note3	±1%	±1%			
	Linear Regulation Note4	±0.5%	±0.5%			
	Load Regulation Note5	±0.5%	±0.5%			
Setup and rise time	1000ms,30ms/230VAC 110V/30mS					
Hold up time (Typ)	50ms/230VAC 110V10mS					
Input	Voltage range	110-264VAC/120-370VDC				
	Frequency range	50HZ				
	Efficiency (Typ)	83%	86%			
	AC current (Typ)	1.23A/100V 0.46A/220V				
	Surge (Inrush) current (Typ)	Cold start: 65A/230VAC				
	Leakage Current	<2mA/240VAC				
Protection	Overload	>105% rated output power				
		Protection type: Hiccup mode, recovers automatically after fault condition is removed				
	Over temperature	Overheat protection starts when temperature in transistor over 140°C Recovers automatically after temperature is normal.				
Environment	Working temp.	-20~+50°C(Please refer to the attenuation curve)				
	Working humidity	20~90% RH,Non-condensing				
	Storage temp & hmdty	-40~+80°C				
	Temp. coefficient	±0.03%/°C (0~50°C)				
	Vibration proof	10~500HZ,5G 10min/1 cycle, period for 60min. each along X、Y、Z axes				
Safety reg. & EMC (Note.6)	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)				
	Voltage proof	I/P-O:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC				
	Isolation resistance	I/P-O/P, I/P-FG,O/P-FG:100M Ohms/500VDC/25°C/70% RH				
	EMC irradiation	EN 55022A:2006;EN61000-3-2:1995+A2:2005				
	EMC disturbance proof	EN 61000-3-2:2006;				
Others	Dimensions	312*18*18mm(L*W*H)				
	Packing	0.093kg/PCS;100PCS/9.3kg				
Remark	1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25°C environment temp. 2.Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor on 20MHz bandwidth. 3.Tolerance(Accuracy): including preset errors, linear adjustment rate and load adjustment rate. 4.Linear adjustment: taken under rated load from low voltage to high voltage. 5.Load adjustment: taken under 0~100% of rated load. 6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.					

# 60W STANDARD SWITCHING POWER SUPPLY SINGLE OUTPUT


## Appearance

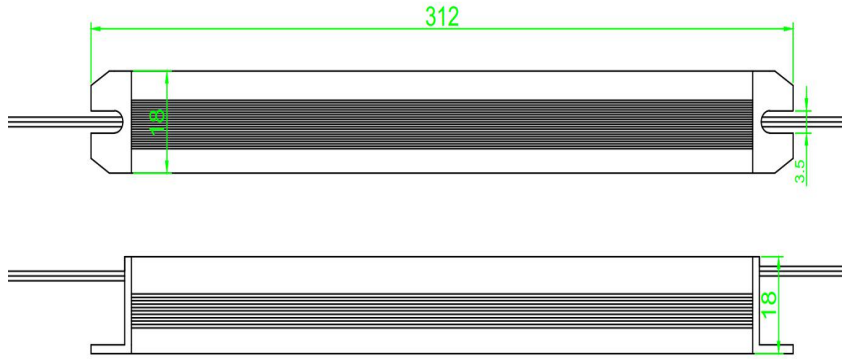


The lines Definitionn

line color	line function
white	AC/L
white	AC/N
red	OUTPUT +
balck	OUTPUT -

## Frame diagram

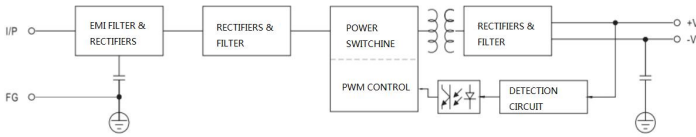

## Derating curve

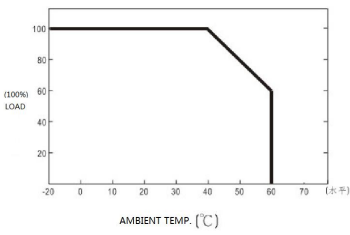

## Static Characteristics

