



60W STNADARD SWITCHING POWER SUPPLY SINGLE OUTPUT



■Applications

- .Industrial automation machinery
- .Mechanical,electrical equipment
- .LED slim lighting equipment
- .IT communication equipment
- .Aging equipment

■Features

- Over-load,Over-temp. protection
- cooling by free air convection
- LED power indicator
- 100% full load burn-in test
- No-load consumption <0.7W
- Withstand 300VAC surge input for 5 seconds
- Working temperature up to 60°C
- 5G vibration tested
- High efficiency,long life,high reliability
- 2 years warranty


(Dimension)
 L:172 mm
 W:53 mm
 H:23mm
 Weight: 0.164Kg




Specifications

Product No.		SSL-60-12	SSL-60-24				
Output	DC voltage	12V	24V				
	Rated Current	5A	2.5A				
	Current Range	0-5A	0-2.5A				
	Rated Power	60W	60W				
	Ripple and Noise(Max)Note.2	150mVp-p	240mVp-p				
	Voltage adjustment	10.8-13.2V	22-27.6V				
	Voltage tolerance	±1%	±1%				
	Linear Regulation	±0.5%	±0.5%				
	Load Regulation	±0.5%	±0.5%				
	Setup and rise time	1000ms,30ms/230VAC 110V/30mS					
Hold up time (Typ)	50ms/230VAC 110V10mS						
Input	Voltage range	175-264VAC/120-370VDC					
	Frequency range	50HZ					
	Efficiency (Typ)	85%	86%				
	AC current (Typ)	0.56A/220V					
	Surge (Inrush) current (Typ)	Cold start: 65A/230VAC					
	Leakage Current	<2mA/240VAC					
Protection	Overload	>105% rated output power					
	Over temperature	Protection type: Hiccup mode, recovers automatically after fault condition is removed					
		Overheat protection starts when temperature in transistor over 140°C					
Environment	Working temp.	-20~+50°C (Please refer to the attenuation curve)					
	Working humidity	20~90% RH,Non-condensing					
	Storage temp & hmdty	-40~+80°C					
	Temp. coefficient	±0.03%/°C (0~50°C)					
	Vibration proof	10~500HZ,5G 10min/1 cycle, period for 60min. each along X、Y、Z axes					
Safety reg. & EMC (Note.6)	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)					
	Voltage proof	I/P-0:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	Isolation resistance	I/P-0/P, I/P-FG, O/P-FG:100M Ohms/500VDC/25°C/70% RH					
	EMC irradiation	EN 55022A:2006;EN61000-3-2:1995+A2:2005					
Others	EMC disturbance	EN 61000-3-2:2006;					
	Dimensions	172*53*23mm(L*W*H)					
Remark	Packing	0.164kg/PCS;100PCS/16.5kg					
	1. Unless specially indicated, all data are taken under 230VAC input, rated load and 25°C environment temp. 2. Ripple and noise: measured with a 12" double ripple cord connected in parallel with a 0.1μF and a 47 μF capacitor on 20MHz bandwidth. 3. Tolerance(Accuracy): including preset errors, linear adjustment rate and load adjustment rate. 4. Linear adjustment: taken under rated load from low voltage to high voltage. 5. Load adjustment: taken under 0~100% of rated load. 6. Power supply is taken as part of the whole system, and needs to be confirmed with terminal instruments for EMC.						


■ Appearance

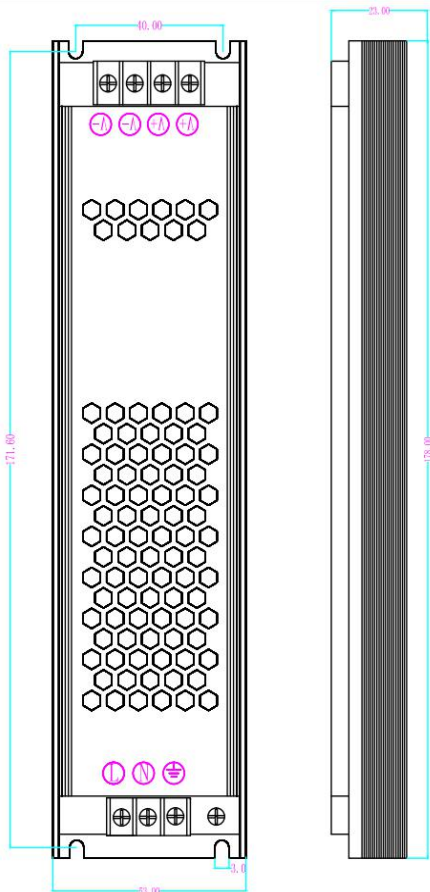

■ Frame diagram

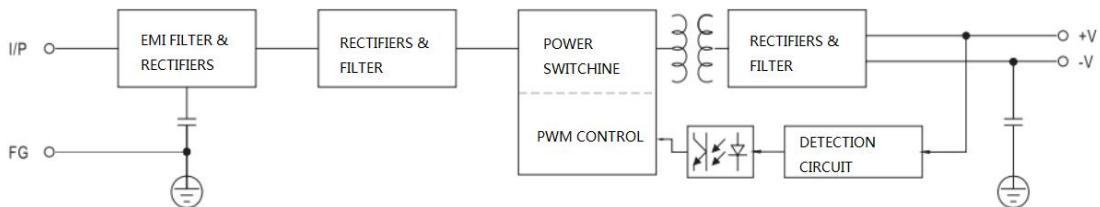

■ Derating curve

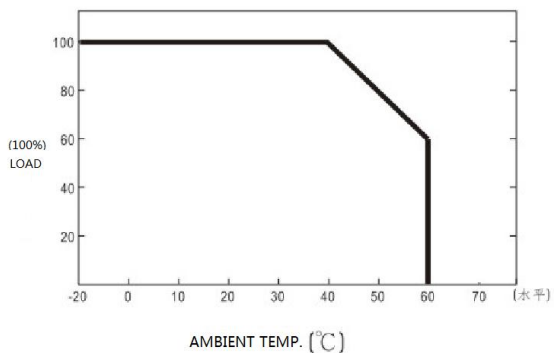

■ Static Characteristics

