



6W POWER ADAPTER SINGLE OUTPUT WA-6 Series



■Applications

- .Industrial automation machinery
- .Industrial control system
- .Testing and measuring instruments
- .Household appliances
- .Led lighting appliances
- .Aging equipment
- .IT communication equipment


■Features

- Universal input voltage
- Protection: short-circuit, overload
- 100% full-load aged
- Withstand 300VAC surge input for 5 seconds
- 20~+60°C Working temperature
- 5G vibration tested
- High efficiency, long life span, and high reliability
- 3 years warranty


Specifications

Product No.		WA-6-12	WA-6-24				
Output	DC voltage	12V	24V				
	Rated Current	0.5A	0.25A				
	Current Range	0.11-0.04A	0.11-0.04A				
	Rated Power	6W	6W				
	Ripple and Noise(Max)Note.2	150mVp-p	200mVp-p				
	Voltage adjustment	-	-				
	Voltage Accuracy Note3	±1%	±1%				
	Linear Adjustment Note4	-	-				
	Load Adjustment Note5	±0.5%	±0.5%				
	Start and rise time	1000ms,30ms/230VAC 1000ms,30ms/110V					
Hold time (Typ)	50ms/230VAC 10ms/115AC						
Input	Voltage range	100-240V					
	Frequency range	50-60Hz					
	Efficiency (Typ)	72%	78%				
	AC current (Typ)	0.18A/90V 0.08A/220V					
	Surge current (Typ)	Cold Start: 65A/230VAC					
	Current leak	<2mA/240VAC					
Protection	Overload	>105% rated output power					
		Protection type : Hiccup mode, recovers automatically after fault condition is removed					
	Overvoltage						
	Overheat						
Environment	Working temp.	-20~+60°C (Refer to the tenuation curve)					
	Working humidity	20~90% RH, without condense					
	Storage temp & hmdty	-40~+80°C					
	Temp. coefficient	±0.03%/°C (0~50°C)					
	Vibration proof	10~500HZ,5G 10min / cycle, X、Y、Z axes 60 min each					
Safety reg. & EMC (Note.6)	Safety regulation	GB195110.1-2004/IEC61347-1:2003 CE(EMC+LVD)					
	Voltage proof	I/P-O:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC					
	insulation resistance	I/P-O/P, I/P-FG,O/P-FG:100M Ohms/500VDC/25°C/70% RH					
	EMC irradiation	EN 55032A:2006;EN61000-3-2:1995+A2:2005					
	EMC disturbance proof	EN 61000-3-2:2006;					
	Dimensions	75*29*43mm(L*W*H)					
	Packing	0.08kg/PCS;100PCS/8.8kg					
Notes:	1. All parameters NOT specially mentioed are measured at 230VAC input, rated load and 25°C of ambient temperature. 2.Ripple and noise are measured at 20MHz bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF and a 47 μF parallel capacitor. 3.Accuracy: including preset errors, linear adjustment rate and load adjustment rate. 4.Linear adjustment: taken under rated load from low voltage to high voltage. 5.Load adjustment: taken under 0~100% of rated load. 6. The power supply is taken as part of the whole system, and needs to be confirmed with final equipment for EMC.						


■ Mechanical Specification

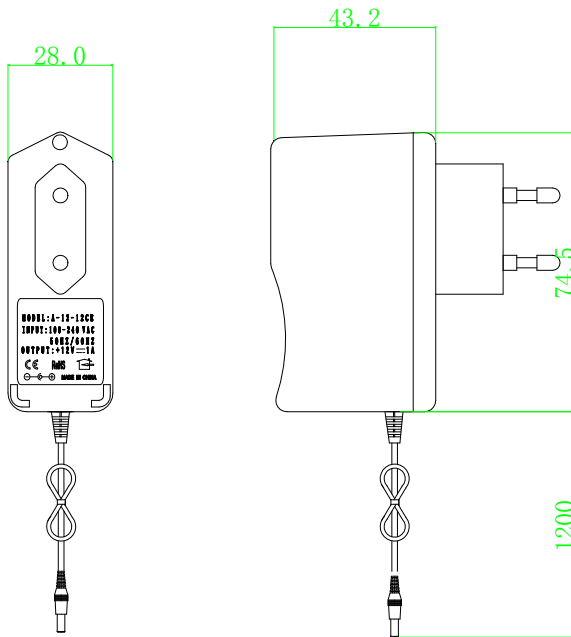

■ Block Diagram

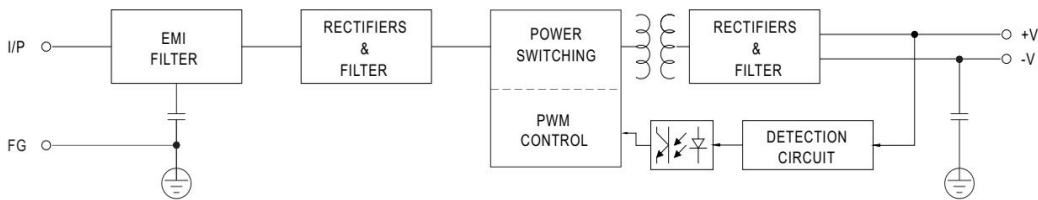

■ Derating Curve

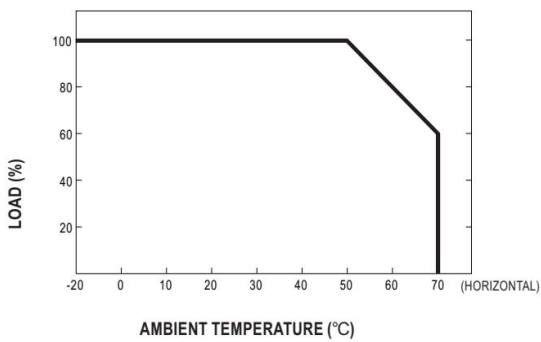

■ Output Derating VS Input Voltage

